



HC28 SPECIFICATIONS

BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery VRLA
- Can be mounted in any orientation except inverted.
- Can be install metal case and fitted with TP brass automotive adaptor on request
- US DOT and IATA certified non-spillable
- Sealed Construction (Non-Spillable Battery)
- Shipped fully charged - just install and go!

PERFORMANCE FEATURES

- ✧ PHCA: 925A at 80°F (27°C);for 5 seconds
- ✧ CCA: 410A at 0°F (-18°C)
- ✧ CA/MCA: 530A at 32°F (0°C)
- ✧ HCA: 625A at 80°F (27°C)
- ✧ Reserve capacity: 48 minutes
- ✧ Short circuit current: 1300A
- ✧ Operation temperature range:
- ✧ 5°F (-15°C) to 122°F (50°C)

Nominal Dimensions

Length		Width		Height		Total Height		Weight	
mm	in	mm	in	mm	in	mm	in	kg	pound
165	6.50	176	6.93	125	4.92	125	4.92	10.70	23.54



HIGH RATE DISCHARGE AT 77°F (25°C)

5 sec.	10 sec.	20 sec.	30 sec.
925A	870A	765A	675A

EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

5min	15min	1hr	3hr	5hr	10hr	20hr
150A	70A	16.8A	7A	4.76A	2.6A	1.4A

PHYSICAL CHARACTERISTICS

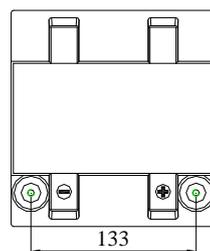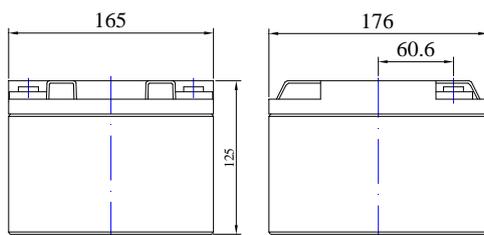

Terminal Type: M8:

unit:mm

