


## DIMENSIONS:

Dimension: 330(L) × 171(W) × 216(H) × 219(TH) Unit: mm

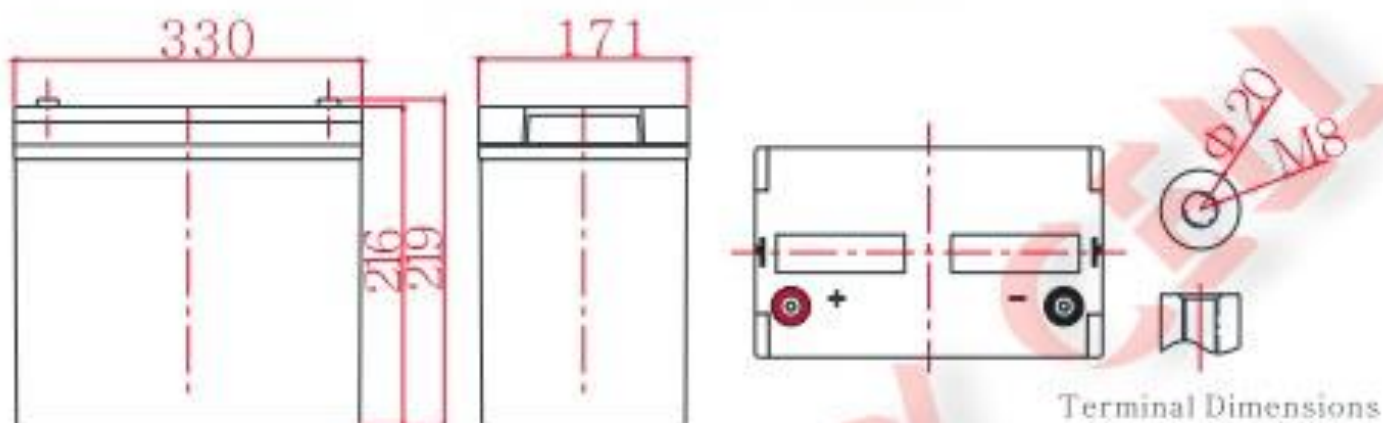

## CONSTANT CURRENT DISCHARGE CHARACTERISTICS


Unit: A (25°C, 77°F)

FV/ Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	591	333	208	127	73	53.3	35.7	24	20	10.8
1.65V	568	328	206	126	72.8	52.6	35.5	23.8	19.8	10.8
1.70V	565	324	206	125	72.5	52.3	35.2	23.7	19.6	10.7
1.75V	527	322	205	124	72.1	52	35	23.5	19.4	10.7
1.80V	484	304	201	123	71.9	51.8	34.6	23.3	19.2	10.6
1.85V	432	272	184	115	68.7	49.3	33	22.5	18.9	10.5


Unit: W/cell (25°C, 77°F)

FV/ Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	328	176	107	62.6	35.9	26	17.5	11.5	9.67	5.07
1.65V	317	171	105	62.2	35.7	25.8	17.3	11.4	9.57	5.05
1.70V	305	167	103	61.8	35.4	25.4	17.1	11.3	9.48	5.02
1.75V	280	161	102	60.8	34.9	25.1	16.9	11.2	9.39	5
1.80V	251	151	98	59.3	34.2	25	16.5	11.1	9.29	4.97
1.85V	224	134	89.4	54.9	32.5	23.5	15.7	10.7	9.01	4.89


### Discharge characteristic

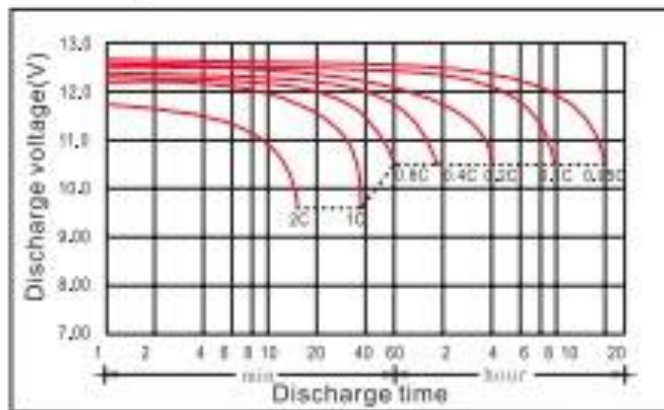


### Charging characteristic

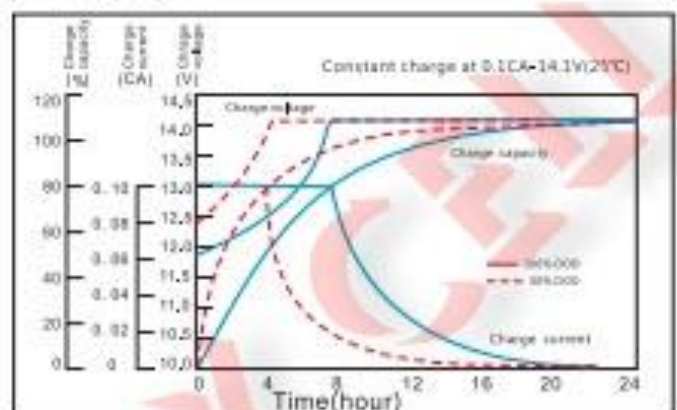


### The effect of temperature on capacity

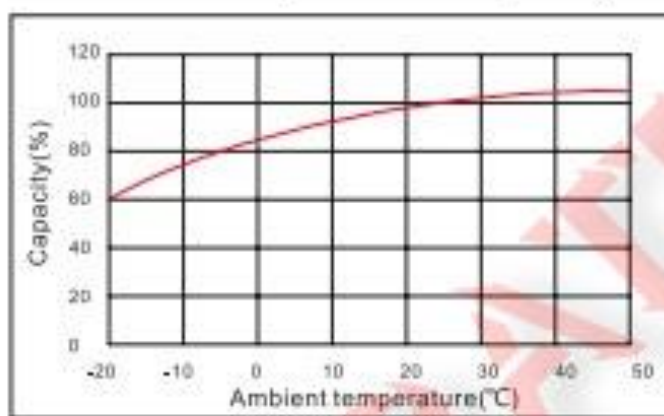

### The effect of discharge depth on cycle life

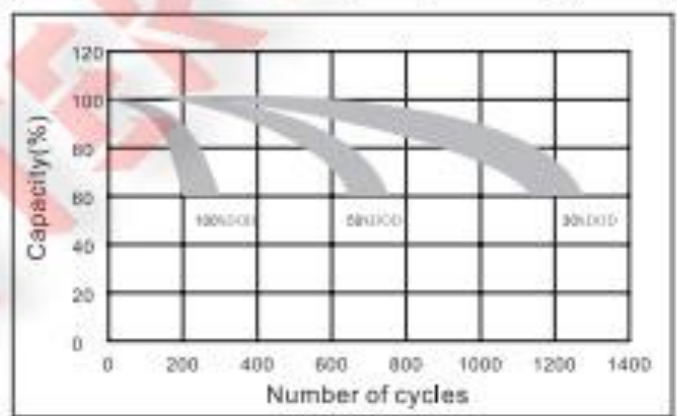

### Curves of self-discharge

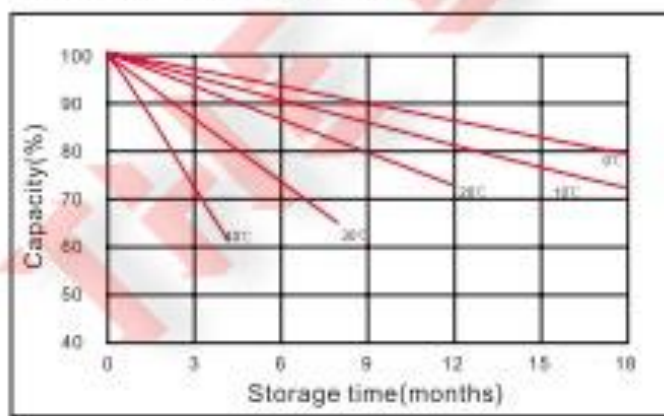

### The effect of temperature on float life

