


10 Amp Voltage Reducer

A 10 Amp unit that converts 24V power down to 12V. Ideal for partnering up with a 10A cigarette lighter socket for powering 12V accessories.

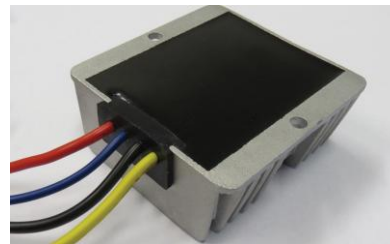

PRODUCT DETAILS

INPUT VOLTAGE	15-40V
OUTPUT VOLTAGE	13.6V
CONSTANT OUTPUT CURRENT	NA
IGNITION SWITCHED OUTPUT CURRENT	10A
STANDBY OPERATING CURRENT	0.015mA
OPERATIONAL CURRENT DRAW	60mA
EFFICIENCY	95%
OVER TEMPERATURE SHUT DOWM	80°C
SIZE (MM)	66 x 56 x 21
WEIGHT	110g
FUSE	10A